# BRUHAT BANGALORE MAHANAGARA PALIKE

## EXECUTIVE ENGINEER -3

## Solid Waste Management

NAME OF WORK : Allied works for Sweep smart Project& other Repairs Works for DWCC centre in ward no 5

Estimate Cost : Rs.18.05 Lakhs

Scanned by CamScanner

**BRUHAT BANGALORE MAHANAGARA PALIKE**

**Project:Allied works for Sweep smart Project& other Repairs Works for DWCC centre in ward no 5**

| Sl. No. | Description of work | Unit | No. | Length m | Breadth m | Depth m | Quantity | Rate in Rs. | Amount in Rs. |
|---|---|---|---|---|---|---|---|---|---|
| 1 | Fabricating, supplying & erecting M.S. angular Truss of span upto 10m. The bottom & top member is provided with 50x50x6mm double equal angles, welded back to back and in between top & bottom line, in areas of mid section is provided with 50x50x6mm equal single angle for vertical and inclined members and at supporting ends 40x40x5mm single angle is provided. All the members are welded together with 6mm gusset plate as per Drawing No.CBS/ SD/K-Mantap/9/MND/97. The entire truss is anchored in RCC column by using 4 Nos. of M.S. anchor bolts at each support, with 10mm thick base plate and shoe plate.The work includes cutting, straightening, placing in position of M.S angle and wleding wherever necessary, and applying one coat of red oxide primer coat to all the members including cost of all materials, labour charges, & hire charges of machineries for cutting, welding, | | | | | | | | |
| | **For Platform** | kg | Nos | Length/ area | Kg/rmt/sqm | | | | |
| | ISMB 150X200 | 1 | 15 | 4 | | 25.40 | 1524.00 | | |
| | C-channel | | | | | | | | |
| | ISMB 150X75 | 1 | 3 | 12.65 | | 14.90 | 565.46 | | |
| | | 1 | 9 | 4.1 | | 14.90 | 549.81 | | |
| | | 1 | | | | | | | |
| | MS square tube50mmX50mmX4mm | 1 | 4 | 4.1 | | 4.93 | 80.85 | | |
| | | 1 | 4 | 12.6 | | 4.93 | 248.47 | | |
| | MS Sheet 6mm thick@ 7850kg/m3 12.10X4.10X0.006x7850=2374.9 | 1 | 1 | 2374.90 | | | 2374.90 | | |
| | MS Gusset plate 320X320X12mmX7850=9.65 | 2 | 12 | | | 9.65 | 231.51 | | |
| | Angles for partition | | | | | | | | |
| | ISA 35X35X4mm below th roof | 8 | 4 | 4.1 | | 2.66 | 348.99 | | |
| | | 4 | 7 | 2.52 | | 2.66 | 187.69 | | |
| | ISA 35X35X4mm Above the roof | 8 | 4 | 4.1 | | 2.66 | 348.99 | | |
| | | 4 | 7 | 2 | | 2.66 | 148.96 | | |
| | for staircase ISMC 150 | 2 | 1 | 4.4 | | 16.40 | 144.32 | | |
| | | 2 | 1 | 1.25 | | 16.40 | 41.00 | | |
| | | 2 | 1 | 1.4 | | 16.40 | 45.92 | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | steps 1.0mx0.25X4 | 13 | | 5.8905 | | | 76.58 | | |
| | For partition | | | | | | | | |
| | MS sheet 3mm thick @ 7850kg/m3 | 8 | | 178.038 | | | 1424.30 | | |
| | For Landing | | | | | | | | |
| | MS sheet3mm thick @ 7850kg/m3 | 2 | | 29.673 | | | 59.35 | | |
| | 1.05x1.2 | | | | | | | | |
| | Ladder | | | | | | 50.00 | | |
| | | | | | | | **8451.09** | 138.24 | **1168279** |
| | ***Pg No 43 It No 7.30 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***128.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***10.24*** | | | | | | | |
| | ***Final Rate*** | ***138.24*** | | | | | | | |

Scanned by CamScanner

| Sl. No. | Description of work | Unit | No. | Length m | Breadth m | Depth m | Quantity | Rate in Rs. | Amount in Rs |
|---|---|---|---|---|---|---|---|---|---|
| 2 | Providing and fixing M.S. Hand railing for Balcony with 50mm dia. M.S. hollow pipe of 14 gauge, welded to 20mmx20mm M.S. square rod placed vertically, spaced at 100mm at regular intervals of 600mm. These vertical rods laterally tied to 3 horizontal rods spaced at equal interval. These assembly is fixed to concrete by using expansion bolts and welding the same to reinforcement bars and making good the surface. All the joints and sections hould be cut to length, welded and grinded wherever necessary etc., complete . The work includes cost of all materials, labour charges for all items of work, hire charges for welding, cutting and grinding equipment, and electricity charges, etc., complete as per specification and drawing. | | | | | | | | |
| | | sqm | | | | | | | |
| | For Platform | | 1 | 16.1 | | 0.90 | 14.49 | | |
| | for staircase | | 2 | 4.8 | | 0.90 | 8.64 | | |
| | | | | | | | **23.13** | 3067.20 | 70944.3 |
| | *Pg No 44 It No 7.35 of PWD SR 2018-19* | | | | | | | | |
| | *Basic rate* | *2840.00* | | | | | | | |
| | *Area Weightage 8%* | *227.20* | | | | | | | |
| | *Final Rate* | *3067.20* | | | | | | | |
| 3 | KSRB 15-18.2 : Providing and applying enamel metal paint two coats ( excluding priming coat ) over new steel or other metal surface brushing to give an even shade after cleaning oil, grease, dirt and other foreign matter, including cost of materials, labour, complete as per specifications. (Page No. 120 Item No. 15.74 of SR 2015-16). | | | | | | | | |
| | | Sqm | | | | | | | |
| | for gate & grill | | 2 | 10.9 | | 5.00 | 109.00 | | |
| | | | | | | | **109.00** | 102.60 | 11183.40 |
| | *Pg No 123 It No 15.74 of PWD SR 2018-19* | | | | | | | | |
| | *Basic rate* | *95.00* | | | | | | | |
| | *Area Weightage 8%* | *7.60* | | | | | | | |
| | *Final Rate* | *102.60* | | | | | | | |
| 4 | KSRB 15-17.6 : Providing and applying painting two coats ( excluding priming coat ) on new wood surface and / or wood based surface with enamel paint to give an even shade, cleaning the surface of all dirt, dust and foreign matter, sand papering including cost of materials, labour, complete as per specifications. (P.No. 118, I.No. 15.60.1 of SR 2016-17). | | | | | | | | |
| | | sqm | | | | | | | |
| | door | 2.25 | 2 | 0.9 | | 2.10 | 8.51 | | |
| | window | 2.25 | 2 | 1.2 | | 1.20 | 6.48 | | |
| | | | | | | | **14.99** | 104.76 | 1569.83 |
| | *Pg No 121 It No 15.60.1 of PWD SR 2018-19* | | | | | | | | |
| | *Basic rate* | *97.00* | | | | | | | |
| | *Area Weightage 8%* | *7.76* | | | | | | | |
| | *Final Rate* | *104.76* | | | | | | | |
| 5 | KSRB 7.11 : Providing and fixing in position aluminium windows and ventilators as per approved drawings with sliding shutters using three track window frame of size 92x31.75mm bottom section 1.3mm thick, weight 1.07kg/m; sides and top sections 1.3 mm, thick, weight 0.933 kg/m.shutter frame section comprising top and bottom section of size 40mmx18mm, wall thickness 1.25mm. weight 0.417 kg./m. shutter side outer 40mmx18mm. wall thickness 1.25mm. weight 0.417 kg/m, shutter interlock section 40mmx26.7mm wall thickness 1.1 mm. thick, weight 0.469 kg/m, the shutters mounted on nylon rollers with approved quality of fixtures such as aluminium handles tower bolts etc.; providing and fixing 5.5mm. thick plain glass for shutters fitted with rubber beading all aluminium sections including cutting to required length, joints mitred subdividing the frame tenonned and rivetted, in the assembled frame, stiffened with end clips for corners, angles etc., and fixed to the walls, lintels, floor beams/cills as the case may be, with necessary steel screws, raul plugs or teak wood gatties including cutting masonry or concrete and making good the original surface using cement mortar.<br>using aluminium section powdered coated to a minimum of 60-70 microns with exterior durable pure polyester grade powder of approved quality. (P.No. 33, I.No. 7.11.2 | | | | | | | | |

Scanned by CamScanner

| Sl. No. | Description of work | Unit | No. | Length m | Breadth m | Depth m | Quantity | Rate in Rs. | Amount in Rs. |
|---|---|---|---|---|---|---|---|---|---|
| | Windows=W | sqm | | | | | | | |
| | | | 2 | 2.85 | | 1.50 | 8.55 | | |
| | | | 3 | 1.50 | | 2.60 | 11.70 | | |
| | | | | | | | 20.25 | 4829.76 | 97802.64 |
| | *Pg No 341 No 7.11.2of PWD SR 2018-19* | | | | | | | | |
| | ***Basic rate*** | ***4472.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***357.76*** | | | | | | | |
| | ***Final Rate*** | ***4829.76*** | | | | | | | |
| 6 | Providing and fixing 6mm clear /opal white/Solar/Bronze /blue/green tinted Multi wall poly carbonate sheet for Tubular structure. The work including cost of all materials, labour charges, and hire charges of machineries for cutting, welding, grinding and erection equipments, complete as per specification. | | | | | | | | |
| | | Sqm | | | | | | | |
| | | | 2 | 2.85 | | 1.50 | 8.55 | | |
| | | | 3 | 1.50 | | 2.60 | 11.70 | | |
| | | | | | | | **20.25** | 3376.08 | **68365.62** |
| | ***Pg No 50 It No 8.27 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***3126.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***250.08*** | | | | | | | |
| | ***Final Rate*** | ***3376.08*** | | | | | | | |
| 7 | KSRB 4-7 : Providing 2 legged scaffolding for stone masonry work using 10-15 cms. dia best quality casurina poles of 4m over all length (3m +0.5m projection + 0.5m In to the ground), the distance between two rows being 1.25m and spacing of posts being 2m in both rows with 2 horizontal posts with 0.5 mm overlap on either side and braces at 2 m c to c including longitudinal and transveres middle braces to step up and providing platform with casurina poles, forms tied up using coir rope complete as per specifications | | | | | | | | |
| | For stone washing | | | | | | | | |
| | north and south side | | 2 | 15 | | 6 | 180.00 | | |
| | East and west side | | 2 | 15 | | 6 | 180.00 | | |
| | | | | | | | **360.00** | 141.60 | **50976.00** |
| | ***Pg No 18 It No 4.43.3 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***120.00*** | | | | | | | |
| | ***Add for lift charges 6rs/floor*** | ***12.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***9.60*** | | | | | | | |
| | ***Final Rate*** | ***141.60*** | | | | | | | |
| 8 | KSRB 4-1.5 : Providing and laying in position plain cement concrete of mix M20 with OPC cement @ 300kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregtes @ 0.43cum, with superplastisiser @3lts confirming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2 | | | | | | | | |
| | For flooring | | 1 | 15.80 | 10.35 | 0.10 | 16.35 | | |
| | | cum | | | | | **16.35** | 5950.80 | **97313.43** |
| | ***Pg No 176 It No 22.6.1 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***5510.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***440.80*** | | | | | | | |
| | ***Final Rate*** | ***5950.80*** | | | | | | | |
| 9 | Ventilators : Fixed lovers 4'-0" x 3'-0" (1219.2x914.4mm) (Box section) outer frame section size of 33x57mm mulllon section. | | | | | | | | |
| | Ventilators | Sqm | 2 | 0.75 | | 0.60 | 0.90 | | |
| | | | | | | | **0.90** | 3760.56 | **3384.50** |
| | ***Pg No 306 It No 38.38.4 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***3482.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***278.56*** | | | | | | | |
| | ***Final Rate*** | ***3760.56*** | | | | | | | |

Scanned by CamScanner

| Sl. No. | Description of work | Unit | No. | Length | Breadth | Depth | Quantity | Rate in Rs. | Amount in R |
|---|---|---|---|---|---|---|---|---|---|
| | | | | m | m | m | | | |
| 10 | SOLID PANEL PVC DOOR SHUTTER Providing & fixing 30mm thick factory made rigid foam Panelled Door Shutters made from M.S. tube of 19 gauge thickness, size 19x19mm fro styles and 15x15mm for top & bottom rails, covered with heat moulded PVC channel of 5mm thick sheet & 30 x 50mm wide to form styles & 5mm thick & 75mm wide PVC Sheets for top rail, lock rail & bottom rail on either side & 5mm thick 20mm wide PVC sheet as gap insert for top rail & bottom rail, Panelling of 5mm thick PVC sheet fitted in the M.S. Frame, Sealed to the styles & rails with 5x30mm PVC sheet beading on either side & joined together with solvent cement adhesive etc., Complete as per manufacturers specification & direction of Engineer-in-charge fixed to frames with 3 nos of 75 m.m Aluminium hinges. | | | | | | | | |
| | | Sqm | 2 | 0.75 | | 2.10 | 3.15 | | |
| | | | | | | | **3.15** | 2999.16 | 9447.1 |
| | ***Pg No 60 It No 9.83 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***2777.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***222.16*** | | | | | | | |
| | ***Final Rate*** | ***2999.16*** | | | | | | | |
| 11 | KSRB 11-2 : Providing and fixing white vitreous china clay, water closet Orissa pattern of size 580 x 440mm with integral type footrests, 100mm S or P trap, 10 litre low level, P.V.C flushing cistern ( all are approved make ) with fittings, C.I / M.S brackets, 32mm diameter flush pipe fittings and clamps, overflow arrangements with special and 25mm mosquito proof coupling of approved design, painting of fittings and brackets, cutting and making good the wall and floor wherever required, including cost of materials, labour complete as per specifications. Specification No. KBS 11. (P.No. 77, I.No.12.2 of PWD SR 2015-16) | | | | | | | | |
| | | Each | | | | | 2.00 | | |
| | | | 2 | | | | **2.00** | 4561.92 | 9123.8 |
| | ***Pg No 79 It No 12.2 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***4224.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***337.92*** | | | | | | | |
| | ***Final Rate*** | ***4561.92*** | | | | | | | |
| 12 | Providing and fixing to wall, ceiling and floor unplasticised PVC 6.00 kgs/sqcm working pressure with pipe fittings, wall clips etc., and making good the wall, ceiling and floor for sanitary pipelines including cost of all materials, labour charges, HOM of acquirements and testing complete as per specifications. - 160mm dia | | | | | | | | |
| | **Sanitary Line** | m | 1 | 10 | | | 10.00 | | |
| | | | | | | | **10.00** | 921.24 | 9212.4 |
| | ***Pg No 90 It No 12.116.3 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***853.00*** | | | | | | | |
| | ***Area Weightage 8%*** | ***68.24*** | | | | | | | |
| | ***Final Rate*** | ***921.24*** | | | | | | | |
| 13 | Providing and fixing Chorinated Poly Venyl Chloride (CPVC) pipes conforming to IS 15778, having thermal stability for hot and cold water supply including all CPVC plain and brass threaded fittings including fixing the pipe with clamp at 1.00 mtr spacing. This includes jointing of pipes and fittings with one step CPVC solvent cement & the cost of cutting chases & making good the same including testing of joints complete. (Concealed work including cutting chases and good the walls etc.) - 25mm nominal OD pipes | | | | | | | | |
| | **Water Line** | m | | | | | | | |
| | | | 1 | 15 | | | 15.00 | | |
| | | | | | | | **15.00** | 316.44 | 4746.6 |
| | ***Pg No 99 It No 13.86.3 of PWD SR 2018-19*** | | | | | | | | |
| | ***Basic rate*** | ***293.00*** | | | | | | | |
| | ***Ar a Weightage 8%*** | ***23.44*** | | | | | | | |
| | ***Final Rate*** | ***316.44*** | | | | | | | |
| 14 | KSRB13-6.1-3 Providing and fixing in position brass bib cock of approved quality 25mm nominal bore including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. | | | | | | | | |
| | | each | | | | | | | |
| | | | 4 | | | | 4.00 | | |

Scanned by CamScanner

| Sl. No. | Description of work | Unit | No. | Length m | Breadth m | Depth m | Quantity | Rate in Rs. | Amount in Rs. |
|---|---|---|---|---|---|---|---|---|---|
| | *Pg No 93 It No 13.25 of PWD SR 2018-19* | | | | | | 4.00 | 254.88 | 1019.52 |
| | *Basic rate* | *236.00* | | | | | | | |
| | *Area Weightage 8%* | *18.88* | | | | | | | |
| | *Final Rate* | *254.88* | | | | | | | |
| | | | | | | | | A.Civil WorksTotal Construction Cost | 1603368.810 |
| | | | | | | | | Add GST Charges 12% | 192404.26 |
| | | | | | | | | Sub Totals | 1795773.07 |
| | | | | | | | | Misscellaneous & Roundng off | 9226.93 |
| | | | | | | | | Total | 1805000.00 |

**Certificate.**

1 The workspot was inspected and work is found to be necessary.
2 The area comes within the Bruhat Bangalore Mahanagara Palike limits.
3 The rates adopted based on the PWD SR, Bangalore circle for year 2018-19& KPWD Electrical SR 2019-20
4 The provisions made in the estimate are necessary and essential.

Assistant Engineer
SWM
B.B.M.P, Bangalore

AEE/Environmental Engineering
ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಘನತ್ಯಾಜ್ಯ ವಿಭಾಗ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ

Executive Engineer
SWM EE-3
B.B.M.P, Bangalore

Administrative sanctioned for Rs: 18,05,000/-
(Rupees: Eighteen lakhs five thousand only)
is according under work code: PO27H 005-21-000001 subject to conditions Cleaning & Transportation of Garbage contained in enclosed meme registered as EE No: EE3/swm/03/20-21 / dt: 11.06.2020

AE/JE TA EE(G SWM)

Technically sanctioned for Rs: 18,05,000/-
(Rupees: Eighteen lakhs five thousand Only)
under: PO27H [005-21-000001] Cleaning & Transportation of Garbage
to conditions contained in enclosed meme registered as EE No: EE-3/swm/02/20-21/
dt: 11.06.2020

AE/JE TA EE(G SWM)

Scanned by CamScanner




Scanned by CamScanner

# BRUHAT BENGALURU MAHANAGARA PALIKE

## 5-JAKKURU

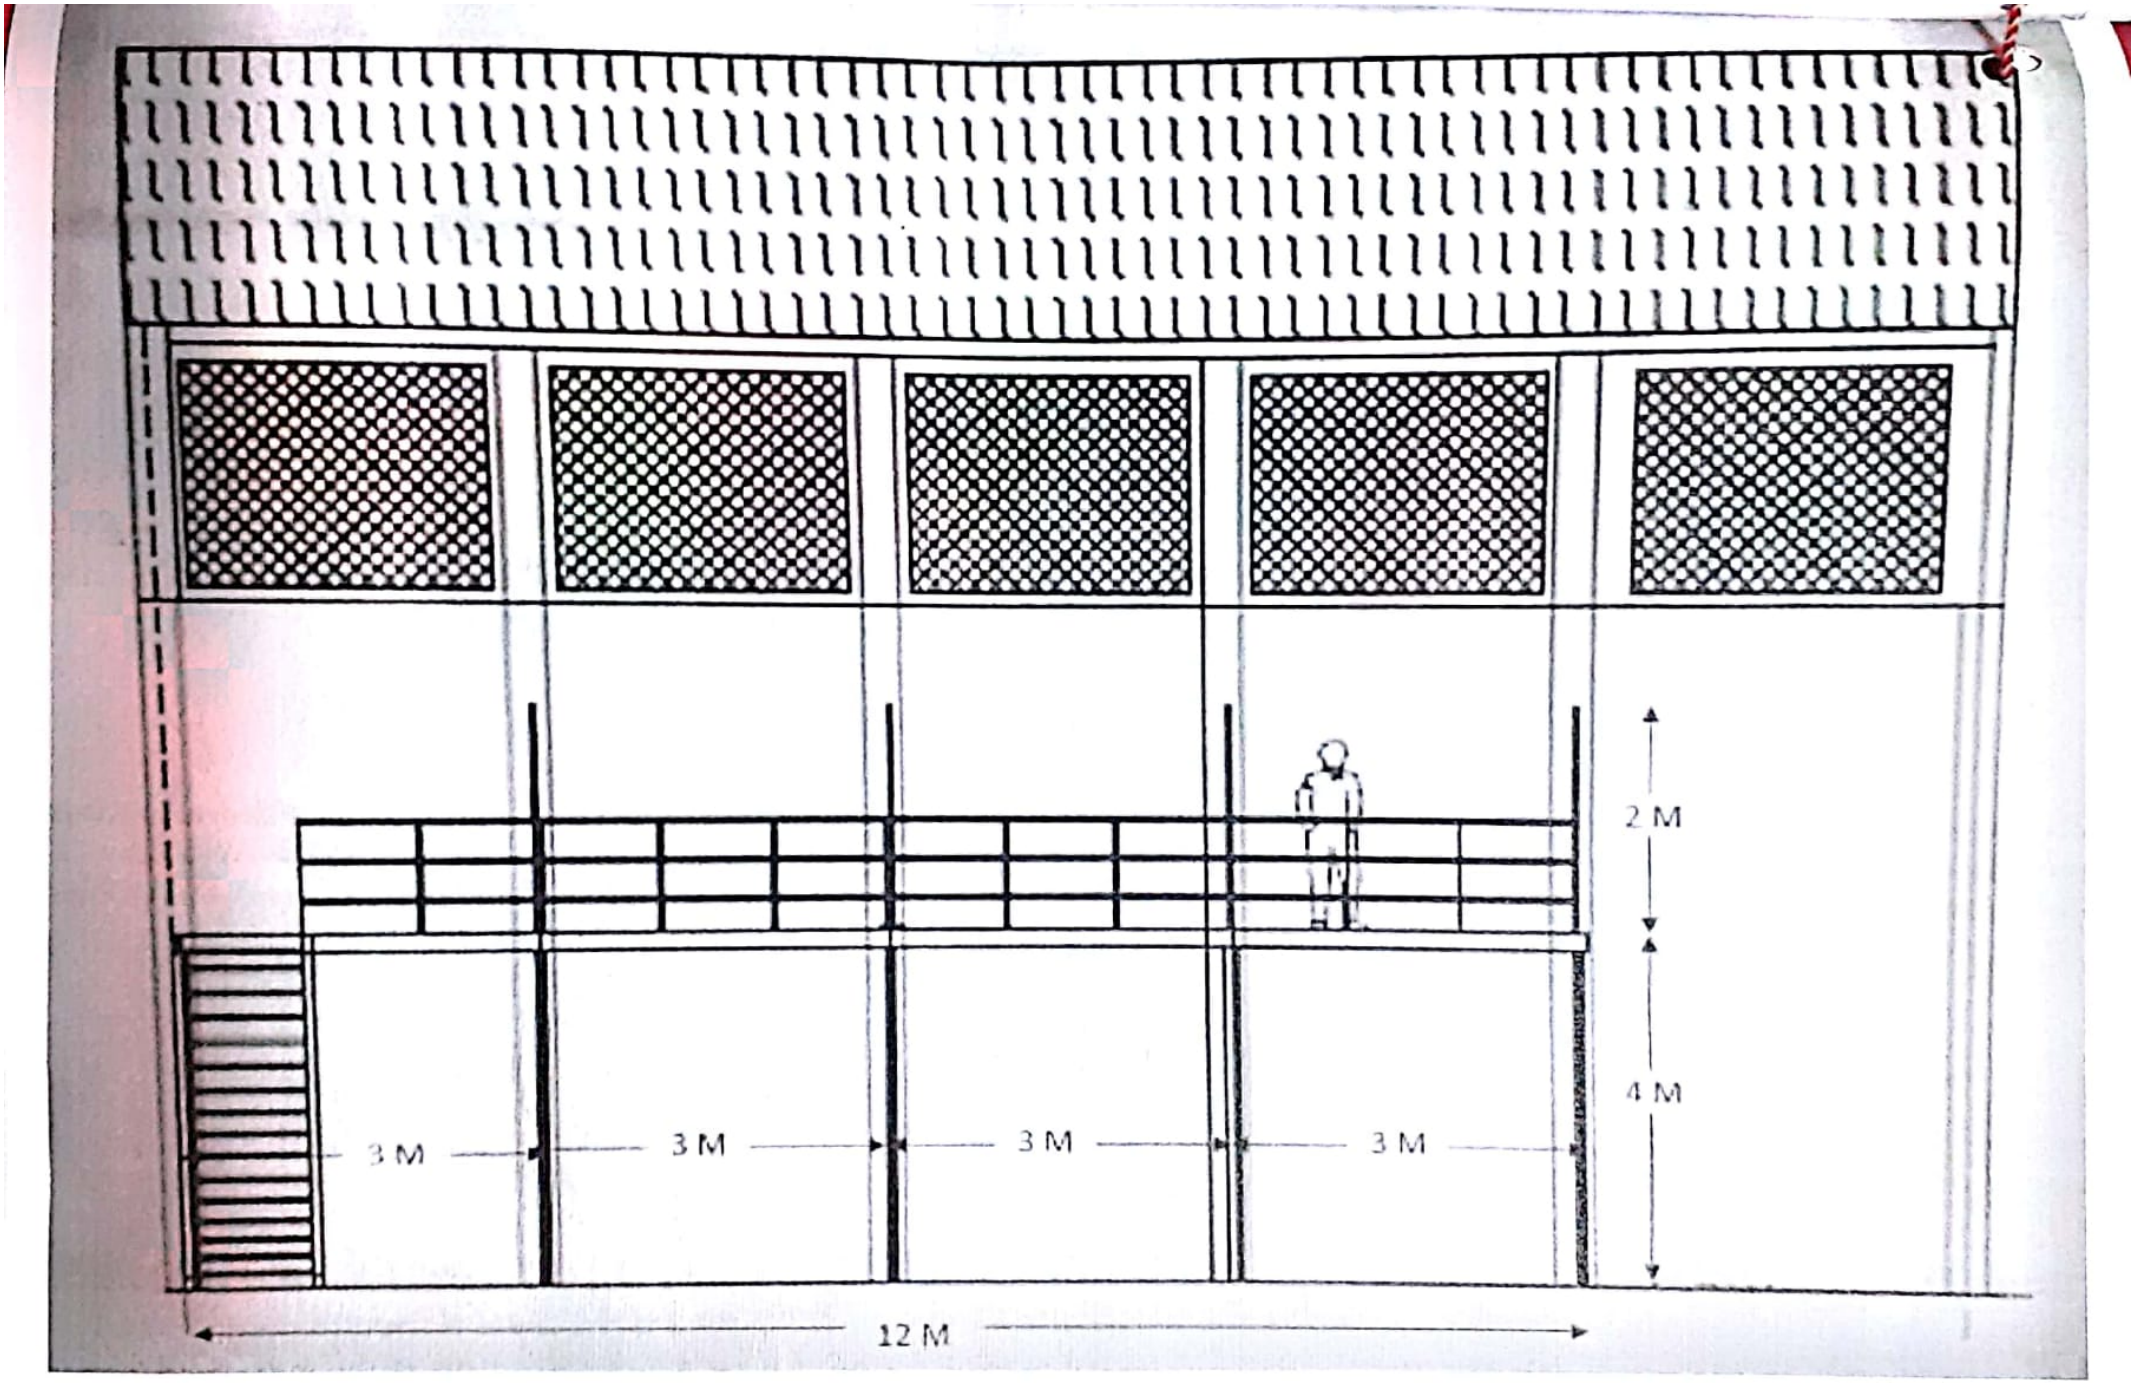


Scanned by CamScanner

## Allied works for Sweep smart Project& other Repairs Works for DWCC centre in ward no 5

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಘನತ್ಯಾಜ್ಯ ನಿರ್ವಹಣೆ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ

Scanned by CamScanner

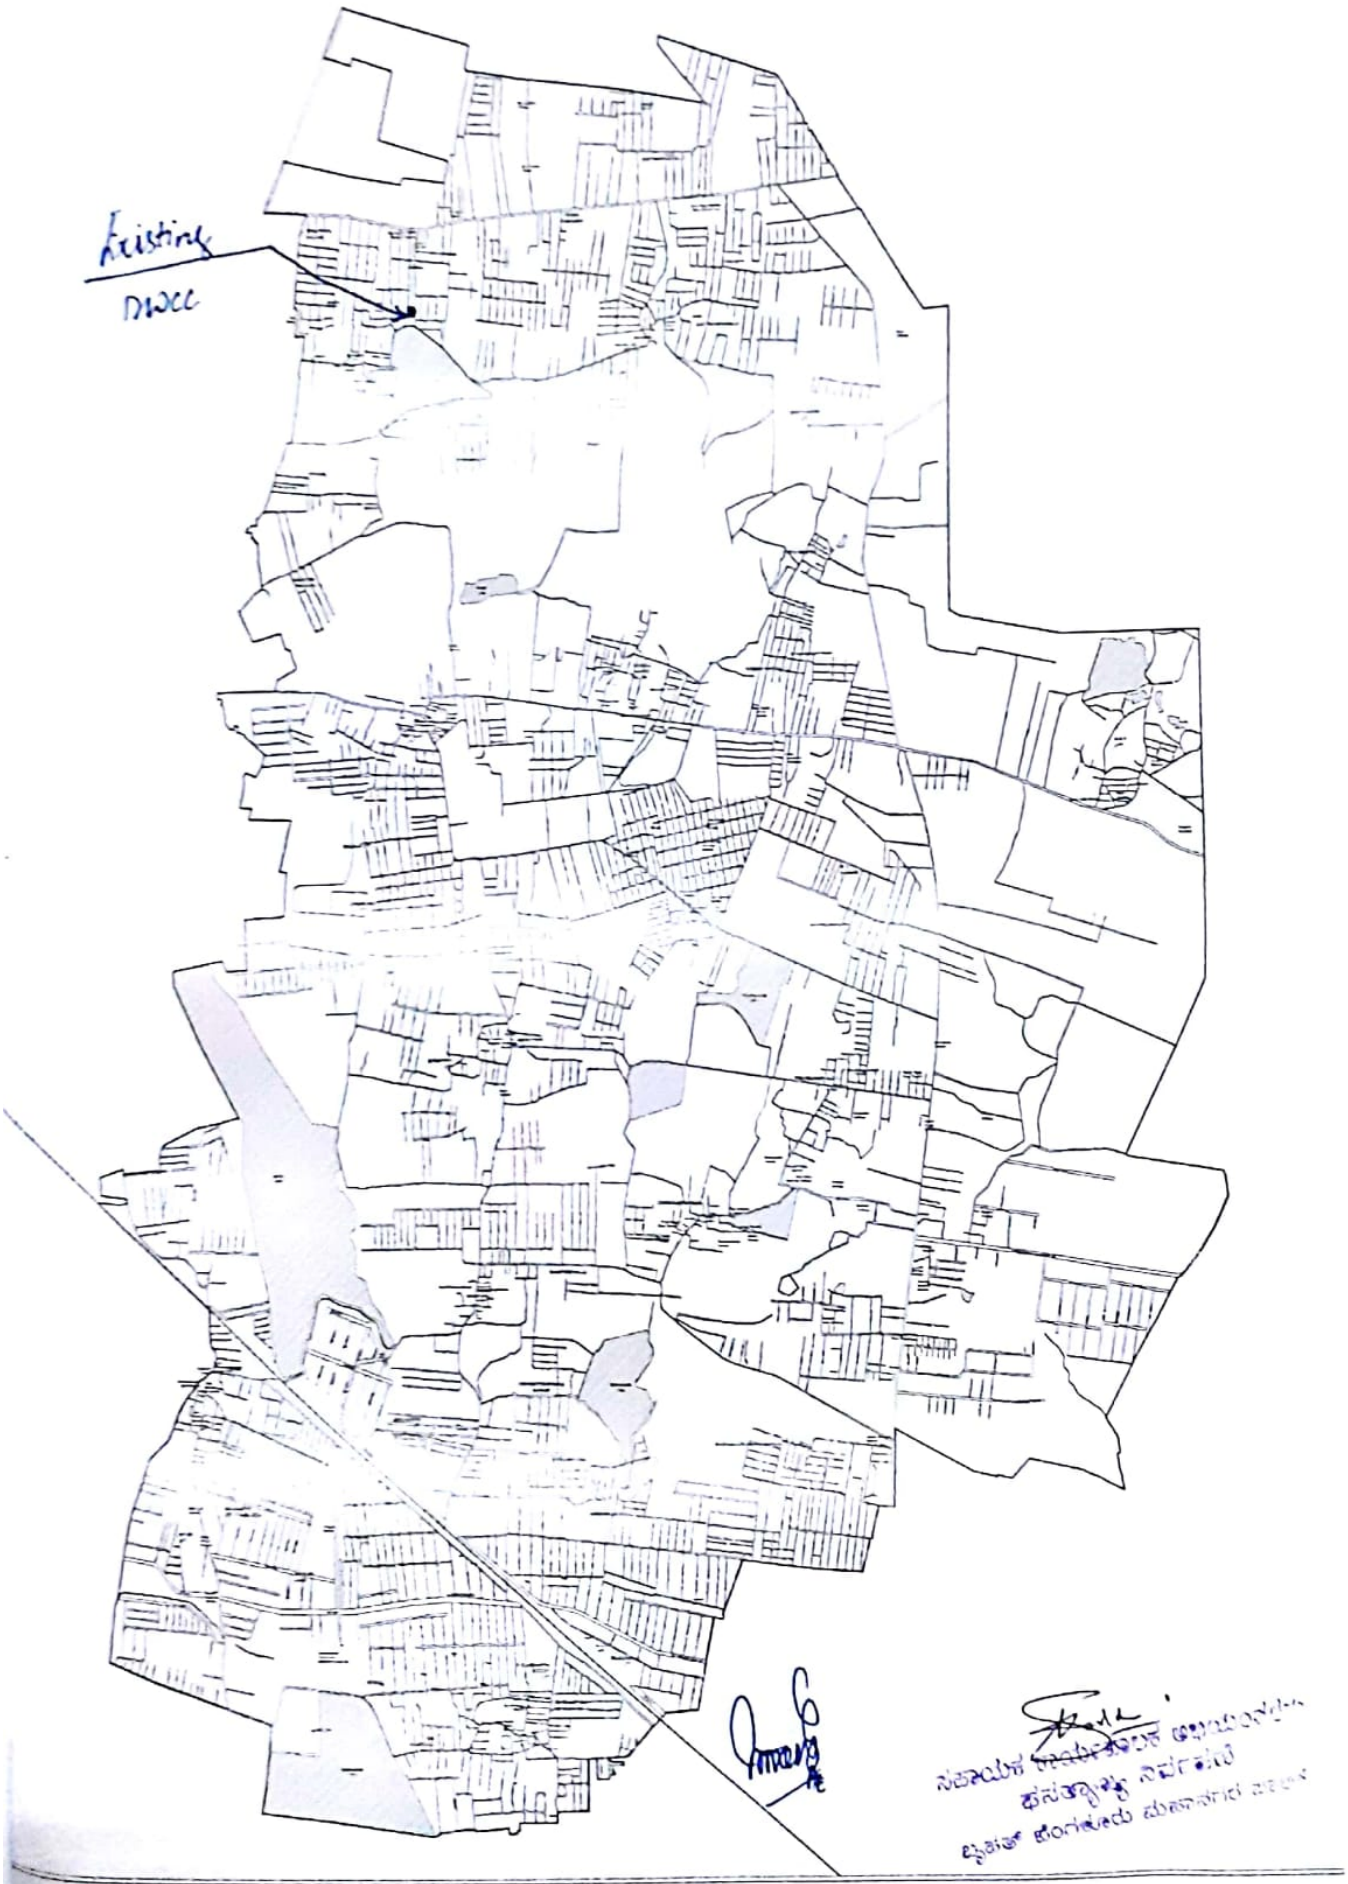सत्यमेव जयते

**INDIA NON JUDICIAL**

**Government of Karnataka**

**e-Stamp**

| | | |
|---|---|---|
| Certificate No. | : | IN-KA17208529235079R |
| Certificate Issued Date | : | 30-May-2019 10:30 AM |
| Account Reference | : | NONACC (FI)/ kabacsl08/ MAGISTRATE COURT/ KA-BA |
| Unique Doc. Reference | : | SUBIN-KAKABACSL08632284366504 20R |
| Purchased by | : | SWEEPSMART WASTE MANAGEMENT PRIVATE LIMITED |
| Description of Document | : | Article 37 Note or Memorandum |
| Description | : | MEMORANDUM OF UNDERSTANDING |
| Consideration Price (Rs.) | : | 0 (Zero) |
| First Party | : | COMMISSIONER B B M P |
| Second Party | : | SWEEPSMART WASTE MANAGEMENT PRIVATE LIMITED |
| Stamp Duty Paid By | : | SWEEPSMART WASTE MANAGEMENT PRIVATE LIMITED |
| Stamp Duty Amount(Rs.) | : | 500 (Five Hundred only) |

Please write or type below this line

# MEMORANDUM OF UNDERSTANDING (MoU)

This MEMORANDUM OF UNDERSTANDING (hereinafter referred to as "MoU") dated 31st May 2019 (the "**Execution Date**") is executed by and between:

**Bruhat Bengaluru Mahanagara Palike (BBMP)**, Civic body having its registered office at N R Square, Bengaluru 560002, Karnataka, India (hereinafter referred to as "**Palike**") and represented by its authorized signatory, by Special Commissioner (SWM) (which expressions shall, unless repugnant to the context or meaning thereof, mean and include its successors and permitted assignees) on the **FIRST PART**

AND



Statutory Alert

Scanned by CamScanner

2. BBMP will match this funding with a total of INR 1.4 crore of direct funding available for the Project
3. Government of Karnataka and BBMP will secure the remaining funding of INR 1.95 crore for the DWCC upgrade through Government of Karnataka State/BBMP budget.
4. The total amount of INR 3.35 crore mentioned in 2) and 3) will be allocated under the following accounting name: 'State Infrastructure Project Fund 2016-17, 2018-19' with the following project name: 'Establishment of Dry Waste Collection Centre / Upgradation of DWCC'.

SweepSmart can upgrade an extra DWCC for INR 47.50 Lakh. Which means that with an additional funding of INR 1.43 crore, SweepSmart will revamp 3 additional centres (example).

In case an external agency/company is funding the upgrade of the DWCC, the external agency/company is entitled to provide their logo on signage or on the wall of the centre, and mention the DWCC in all their promotion materials. The same holds for SweepSmart in all of the centres that have been upgraded.

*Fees:*

For the above Contracting services, the BBMP shall pay a consolidated fee of INR 3,35,00,000/- (Indian Rupees Three Crores and Thirty-Five Lakhs only) calculated by the total project fee of INR 4,75,00,000/- reduced by contribution from SweepSmart (value of contribution in kind) and fund contribution by the RWA amounting to INR 1,40,00,000/-.

Out of this INR 3,35,00,000/-, a consolidated fee of INR 2,00,00,000/- (Indian Rupees Two Crores only) will be paid to SweepSmart for DBIT activities (INR 60,00,000/-) and delivery of hardware (INR 1,40,00,000/-). The remaining amount of 1,35,00,000/- (Indian Rupees One Crore and Thirty Five Lakhs only) for rebuilding will be paid directly by BBMP to the construction agency(s), mutually agreed between BBMP and SweepSmart.

The consolidated fees will be paid during the contract period as specified in the payment and reporting schedule below. The above fee shall be exclusive of all statutory duties & taxes applicable if any, such as goods and service tax etc., payable for the services rendered by the Consultant.



Scanned by CamScanner

ಈ ಮುದ್ರಿತ ಪುಟವನ್ನು ಸಂಪೂರ್ಣ ಅಥವಾ ಭಾಗಶಃ ಕಪ್ಪು ಬಣ್ಣ(ಶಾಯಿ)ದಲ್ಲಿ ನಕಲು ಮಾಡುವುದು.

ಕರ್ನಾಟಕ ರಾಜ್ಯ ನೋಂದಣಿ ಮತ್ತು ಮುದ್ರಾಂಕ ಇಲಾಖಾ ನೌಕರರ ವಿವಿಧೋದ್ದೇಶ ಸಹಕಾರ ಸಂಘ ನಿಯಮಿತ

ದಾಖಲೆಯ ಪಾಳೆ
Document Sheet

The Karnataka State Registration and Stamps Department
Official's Multipurpose Co-Operative Society Ltd.

ಈ ಪಾಳೆಯನ್ನು ಯಾವುದೇ ದಾಖಲೆಯಲ್ಲಿ ಉಪಯೋಗಿಸಬಹುದು
This sheet can be used for any document

ಬೆಲೆ : ರೂ. 2/-
(GST EXTRA)

*Payment and Reporting Schedule (detail of cost break-down and deliverables below):*

| Amount | Date |
|---|---|
| Amounts to be paid to SweepSmart: | |
| INR 15,00,000/- excl. tax (Indian Rupees Fifteen Lakhs only) | 31st May 2019 (at project start date) |
| INR 1,20,00,000/- excl. tax (Indian Rupees One Crore and Twenty Lakhs only) | 31st July 2019 (after hardware and high-level rebuilding specifications for all sites are ready ) |
| INR 50,00,000/- excl. tax (Indian Rupees Fifty Lakhs only) | 31st December 2019 (after all hardware is installed) |
| INR 15,00,000/- excl. tax (Indian Rupees Fifteen Lakhs only) | 31st May 2020 (upon completion of the total project) |
| Amount to be paid to construction agency directly, not to SweepSmart: | |
| INR 1,35,00,000/- excl tax (Indian Rupees One Crore and Thirty-Five Lakhs only) | To be negotiated with (government) construction agency.<br>BBMP to have the full amount available at 31st May 2019 (project start date) to ensure smooth implementation of the project |



Scanned by CamScanner

7. Execution in Counterparts. For the convenience of the parties, this Agreement may be executed in one or more counterparts, each of which shall be deemed an original and all of which together shall constitute one and the same instrument.

8. Governing Law. This Agreement shall be governed by and construed in accordance with the internal laws of India (excluding application of any choice of law doctrines that would make applicable the law of any other state or jurisdiction), and where applicable the State Laws prevailing

9. Severability. If any provision of this Agreement is for any reason and to any extent deemed to be invalid or unenforceable, then such provision shall not be voided but rather shall be enforced to the maximum extent than permissible under then applicable law and so as to reasonably effect the intent of the parties hereto, and the remainder of this Agreement will remain in full force and effect

10. The Parties warrant and represent that it has full power to enter into this understanding and to carry out its obligations under this contract and the signatory signing this contract on their respective behalf are duly authorized to do so and irrevocably binds the respective parties to the contract

Authorized Signatory
BBMP

Authorized Signatory
SweepSmart

Date: 31st May 2019
Place: Bengaluru



Scanned by CamScanner

ಕರ್ನಾಟಕ ಸರ್ಕಾರ

ಸಂಖ್ಯೆ: ನಅಇ 10 ಎಂಎನ್‌ವೈ 2018

ಕರ್ನಾಟಕ ಸರ್ಕಾರದ ಸಚಿವಾಲಯ,
ವಿಕಾಸಸೌಧ,
ಬೆಂಗಳೂರು, ದಿನಾಂಕ: 03-05-2019.

ಇವರಿಂದ,

ಸರ್ಕಾರದ ಅಪರ ಮುಖ್ಯ ಕಾರ್ಯದರ್ಶಿ,
ನಗರಾಭಿವೃದ್ಧಿ ಇಲಾಖೆ,
ವಿಕಾಸಸೌಧ, ಬೆಂಗಳೂರು.

ಇವರಿಗೆ,

ಆಯುಕ್ತರು,
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ,
ಬೆಂಗಳೂರು.

ಮಾನ್ಯರೇ,

ವಿಷಯ: ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆಯ ವ್ಯಾಪ್ತಿಯಲ್ಲಿ ನಿರ್ಮಿಸಿ ನಿರ್ವಹಣೆಗೆ ವಹಿಸಿರುವ 10 ಒಣತ್ಯಾಜ್ಯ ಸಂಗ್ರಹಣಾ ಕೇಂದ್ರಗಳನ್ನು ನೆದರ್‌ಲ್ಯಾಂಡ್ ಸಹಯೋಗದೊಂದಿಗೆ ಉನ್ನತೀಕರಿಸಲು ಸರ್ಕಾರದ ಪರವಿಂದ ಕೆ.ಟಿ.ಪಿ.ಪಿ. ಕಾಯ್ದೆ 1999ರ ಕಲಂ 4(ಜಿ) ರಡಿಯಲ್ಲಿ ವಿನಾಯಿತಿ ನೀಡಲು ಮತ್ತು ಕರಡು MOU ಗೆ ಅನುಮತಿಯನ್ನು ನೀಡುವಂತೆ ಕೋರಿರುವ ಬಗ್ಗೆ.

ಉಲ್ಲೇಖ: 1. ತಮ್ಮ ಪತ್ರ ಸಂಖ್ಯೆ: ಆ.ಆ.ಶಾ/ಪಿಆರ್/(G)6187/2017-18, ದಿನಾಂಕ: 11-12-2017.
2. ಸರ್ಕಾರದ ಆದೇಶ ಸಂಖ್ಯೆ: ನಅಇ 10 ಎಂಎನ್‌ವೈ 2018, ದಿನಾಂಕ: 06-03-2018.
3. ಸರ್ಕಾರದ ಸಮ ಸಂಖ್ಯೆಯ ಪತ್ರ ದಿನಾಂಕ: 12-04-2018 ಮತ್ತು 05-07-2018.
4. ತಮ್ಮ ಪತ್ರ ಸಂಖ್ಯೆ: ಆ.ಆ.ಶಾ/ಪಿಆರ್/(G)560/2018-19, ದಿನಾಂಕ: 14-06-2018.
5. ಸರ್ಕಾರದ ಸಮ ಸಂಖ್ಯೆಯ ಪತ್ರ ದಿನಾಂಕ: 10-08-2018.
6. ತಮ್ಮ ಪತ್ರ ಸಂಖ್ಯೆ: ಆ.ಆ.ಶಾ/ಪಿಆರ್/(G)7686/2018-19, ದಿನಾಂಕ: 15-02-2019.

* * * * *

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ, ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆಯ ವ್ಯಾಪ್ತಿಯಲ್ಲಿ ನಿರ್ಮಿಸಿ ನಿರ್ವಹಣೆಗೆ ವಹಿಸಿರುವ 10 ಒಣತ್ಯಾಜ್ಯ ಸಂಗ್ರಹಣಾ ಕೇಂದ್ರಗಳನ್ನು ನೆದರ್‌ಲ್ಯಾಂಡ್ ಸಹಯೋಗದೊಂದಿಗೆ

. . . 2 .

Scanned by CamScanner